



GPSMAP® H1 Powered Mount Installation Instructions

Important Safety Information

 **WARNING**


See the *Important Safety and Product Information* guide in the GPS device product box for product warnings and other important information.

Installing the Device in the Mount

NOTICE


Before you place the device in the mount, ensure the metal contacts on the device and the mount are dry. Moisture on the contacts causes equipment damage. Use the weather cap to keep the mount dry.

- 1 Pull up the weather cap ① to expose the metal contacts on the mount.

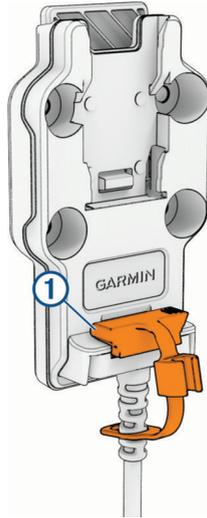


- 2 Align the mounting spine with the notches in the middle of the mount, and slide the device down until it snaps into place.

NOTE: You should not try to slide the device onto the mount from the top.

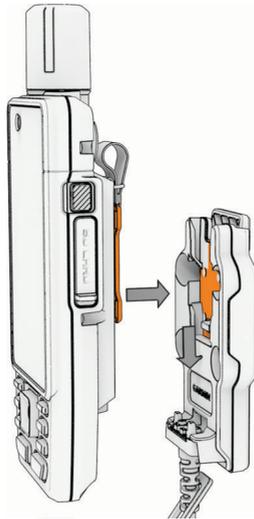

Removing the Device from the Mount

- 1 Press the tab ① on the mount to release the device.

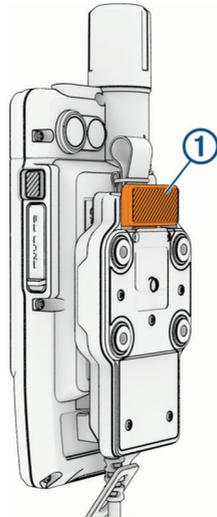

- 2 Lift the device out of the mount.
- 3 Place the weather cap on the metal contacts.


Connecting Power to the Mount

- 1 Select a mounting location based on available power sources and an unobstructed view of your surroundings.
- 2 Route the USB cable, and connect it to USB port that can provide at least 5 V, 3 A.
NOTE: USB ports with lower power ratings may not work.

Attaching an AMPS Base Plate to the Mount

NOTE: The base plate and mounting hardware is not included with all powered mounts.

- 1 Thread the screws ① through the washers ②, mount ③, and base plate ④.

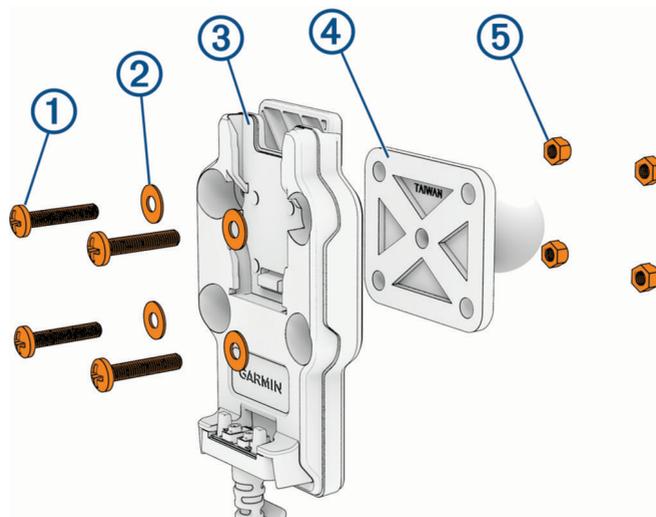

- 2 Tighten the nuts ⑤ to secure the base plate.
NOTE: The recommended torque is 1.7 to 2.25 N-m (15 to 20 lbf-in.).


Mounting the Device in an Automobile

NOTICE

Some jurisdictions prohibit or restrict the placement of objects on the windshield of a motor vehicle. IT IS THE USER'S RESPONSIBILITY TO MOUNT THE DEVICE IN COMPLIANCE WITH ALL APPLICABLE LAWS AND ORDINANCES. Always mount your Garmin® device in a location that does not obstruct the driver's view of the road. Garmin does not assume any responsibility for any fines, penalties, or damages that may be incurred as a result of any law or ordinance relating to the use of your Garmin device.

NOTE: The suction cup is not included with all powered mounts.

- 1 Clean and dry your windshield and the suction cup with a lint-free cloth.
- 2 Press the suction cup to the windshield, and flip the lever ① back toward the windshield.

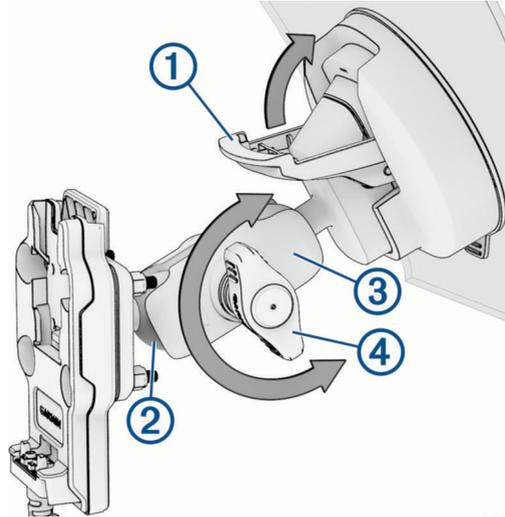

- 3 Align the ball of the suction cup mount and the ball of the base plate ② with the double-socket arm ③.
- 4 Tighten the knob ④ slightly.
- 5 If necessary, adjust for better viewing and operation.
- 6 Tighten the knob to secure the mount.

© 2025 Garmin Ltd. or its subsidiaries

Garmin®, the Garmin logo, and GPSMAP® are trademarks of Garmin Ltd. or its subsidiaries, registered in the USA and other countries. These trademarks may not be used without the express permission of Garmin.